

SPTT

Telescopic

Material Top Ø209 / Bottom Ø280 steel
Finish Black sheradised



PAS68 TESTED

SPTT **3**

V7500 (N2) 64/90 : 0.5/6.1

- Double retractable
- Shallow mount
- Automatic


The ATG Telescopic bollard has a unique double action retractable design which ensures smooth operation and acts as a depth saving feature. It has been successfully impact tested in accordance with BSI PAS 68:2010, arresting a 7,500kg truck at 64km/h and with less than 1m penetration.

This latest innovation in technology allows the use of automatic bollards for high security solutions to be installed in areas where underground services or lack of space for excavation may cause a problem.

The Shallow TT fits into the existing range of high security systems to ensure that there is a solution to meet any of a customer's requirements. The bollard stands one metre tall yet only requires 900mm footing, significantly less than usual high security retractable bollards.

It is the strongest reduced-depth automatic bollard on the market.

Plan View
Impact Direction

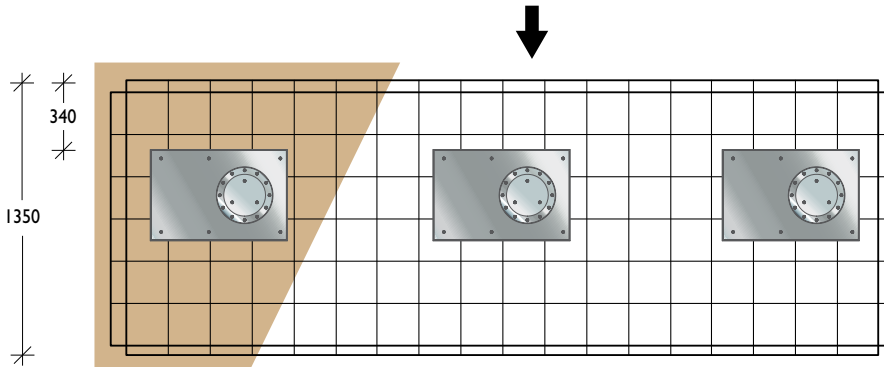

Front View / Section

