

Industrial



RPGS

Fabrication


Frame
75 x 75 RHS



Frame
50 x 50 RHS




Viewed from
secure side

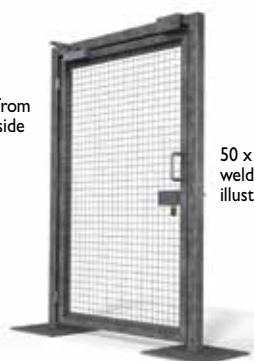

50 x 50 x 4
welded mesh
illustrated

Optional Disabled Access Kit

- Low energy (DDA compliant) 240V / 2.5A
- Complies with emergency exit requirements
- Controlled via a PLC
- Programmable to work with access control systems
- Other options include UPS function, electric locking and safety sensor.



Security

PSWS / PSWSC

Fabrication



Post / O/head Rail
75 x 75 RHS



Frame
50 x 50 RHS





PSWS




With overhead rail

PSWSC



Viewed from
secure side

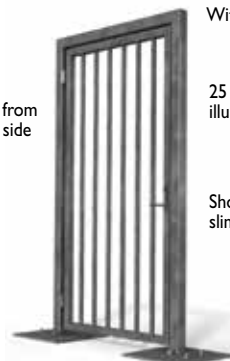


With overhead rail

25 x 25 RHS pickets
illustrated

Shown with
slimline mortice lock.

25 x 25 RHS pickets
illustrated
> Refer to p76
for infill options



Lock Options					Auto Closer	Finish		
Padlock	Drop Bolt	Mortice	Magnetic	Electric		Hot Dip Gal	Powdercoat	Wet Spray
Standard	Standard	N/a	N/a	N/a	N/a	Incl	Incl	Opt
N/a	N/a	Optional	Optional	Optional	Optional	Incl	N/a	Opt
Optional	Optional	Optional	Optional	Optional	Optional	Incl	N/a	Opt
Optional	Optional	Optional	Optional	Optional	N/a	Incl	Incl	Opt
Optional	Optional	Optional	Optional	Optional	Optional	Incl	Incl	Opt